

HS1212H

GB/CE/ANSI Compliance

HIGHLIGHTS

- Optimized matching, high cycle times, better endurance.
- Precise control greatly improves the smoothness of operating.
- Large ground clearance, stronger passability

Low Maintenance Cost

- Universal and modular design, easy maintenance.
- Swing out trays of batteries and hydraulic system.
- More durable, stable and safe.

Configurations Standard



Folding Guardrails	Platform Self-lock Door	Safety Arm
Emergency Stop	Charging Protection	Emergency Descent
Hour Meter	Pothole Protector	Proportional Control
Flashing Beacon	Automatic Braking System	Tilt Sensor
Self-diagnosis	Forklift Hole	Full Height Drive
Extension Platform	Motion Alarm	Horn

Optional

Load Sensing System
AC Power to the Platform
Air Pipe to the Platform



MODEL	HS1212H
Max. Working Height(In/out)	13.8m/9.5m
A-Max. Platform Height(In/out)	11.8m/7.5m
B-Platform Length	2.26m
C-Platform Width	1.12m
Extension Size	0.9m
D-Heights (Rails Up)	2.62m
Height (Rails Down)	2.09m
E-Length (with Ladder)	2.49m
F-Overall Width	1.19m
G-Wheel Base	1.87m
H-Clearance (Stowed)	0.1m
I-Clearance (Raised)	0.02m
PERFORMANCE	
Platform Capacity	320kg
Extension Capacity	113kg
Max. Occupancy(in/out)	2/1
Max.Drive Speed (Stowed)	3.5km/h
Drive Speed (Raised)	0.8km/h
Turning Radius (Out.)	2.3m
Up/Down Time	65/60s
Gradeability	25%
Max. Slope	1.5°/3°
Control	Proportional
Drive	FWD
Multi Disc Brake	Rear
Tires (mm)	381mmX127mm
Max.Wind Speed	12.5m/s
POWER	
Charger	100-240VAC/10A
Lithium battery	24V/230Ah
Batteries (V/Ah)	24V/200Ah
WEIGHT	
Weight	3020kg

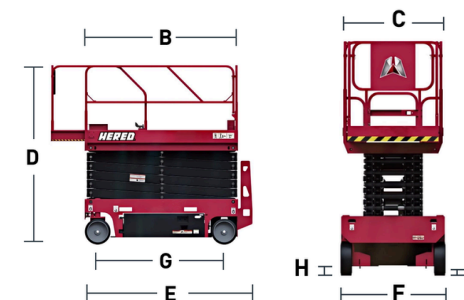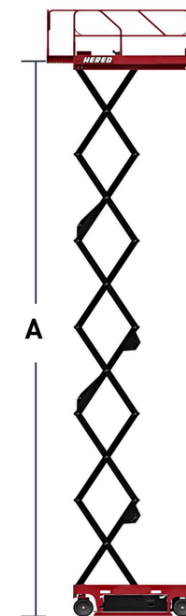

Let customers win first