

HA16JE/RJE Lead-acid or Lithium

GB/CE/ANSI Compliance

HIGHLIGHTS

- AC motor drive, smooth driving, better micro mobility.
- High-precision overload sensing system to reduce accidental and false alarm shutdown.
- Smoother slew ensured by integrated slewing reducer; comprehensive protections suitable for dusty environments.
- Smoother actions and more energy saving thanks to zero-emission devices
- Large capacity battery with strong endurance.

Configurations Standard

Horn
Proportional Controls
Motion Alarm
Flashing Beacons
Emergency Descent System
Emergency Stop



Automatic Leveling Platform
Fault Diagnosis System
Overload Sensing System
Self-lock Gate
Anti-extrusion device

Optional


AC Power to the Platform
Air Pipe to the Platform

Let customers win first

MODEL	HA16JE	HA16JE-Li	HA16RJE
Max.Working Height	17.7m	17.7m	17.7m
Max. Platform Height	15.7m	15.7m	15.7m
Max. Horizontal Extension	9.13m	9.05m	9.23m
Max.Up and Over Height	7.6m	7.63m	7.6m
A- Length (Stowed)	6.98m	6.86m	6.98m
B- Width (Stowed)	1.95m	1.95m	1.95m
C- Height (Stowed)	1.96m	2m	1.96m
D- Platform Length	1.52m	1.8m	1.52m
E- Platform Width	0.76m	0.76m	0.76m
F- Wheelbase	2.01m	2.01m	2.01m
G- Ground Clearance	0.23m	0.23m	0.23m
PERFORMANCE			
Platform Capacity	230kg	230kg	230kg
Max.Drive Speed (Stowed)	4.8km/h	4.8km/h	4.8km/h
Gradeability	30%	30%	30%
Turning Radius(In.)	0.8m	0.8m	0.8m
Turning Radius(Out.)	3.8m	3.8m	355°
Turntable Rotation	355°	355°	355°Non-Continuous
Vertical JIB rotation	/	/	±80°
Platform Rotation	±80°	±80°	±85°
H- Turntable Tailswing	0.06m	0.15m	0.06m
Tilt Rating	4.5°	4.5°	4.5°
Operating Wind Speed	12.5m/s	12.5m/s	12.5m/s
Lift Motor	5kw	5kw	5kw
Drive Motor	5kw	5kw	5kw
POWER			
Batteries(V/Ah)	48V/310Ah	51.2V/280Ah	51.2V/280Ah
Charger	100-240VAC/13.5A	100-240VAC/13.5A	100-240VAC/13.5A
Tires	705X210X445	705X210X445	705x210x445
WEIGHT			
Weight	7850kg	7950kg	7850kg



HA16JE/HA16JE-Li

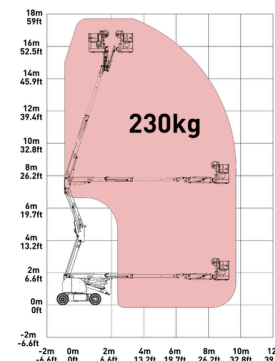

HA16RJE