


HA14JE Lead-acid or Lithium

GB/CE/ANSI Compliance

HIGHLIGHTS

- AC motor drive, smooth driving, better micro mobility, zero tail swing, suitable for operation in narrow spaces.
- High-precision overload sensing system to reduce accidental and false alarm shutdown.
- Integrated rotary reducer makes smooth turning, comprehensive protection can adapt to dust environment.
- Large capacity batteries, strong endurance.

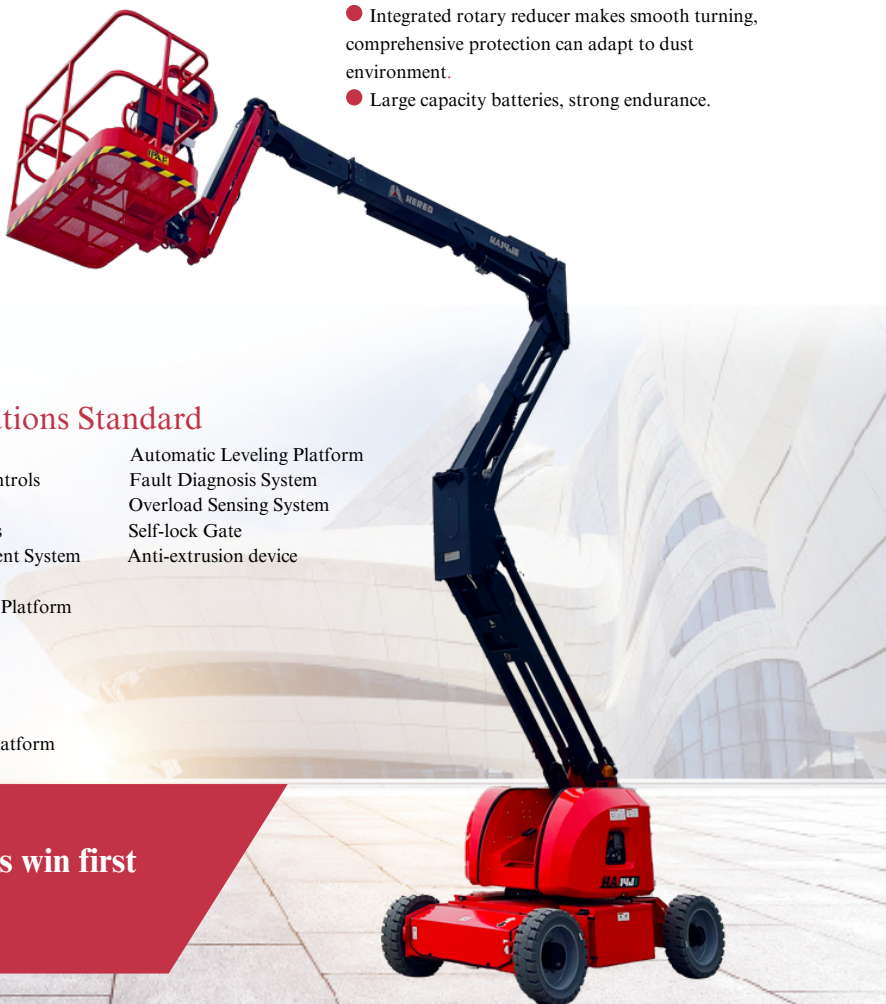

Configurations Standard

Horn	Automatic Leveling Platform
Proportional Controls	Fault Diagnosis System
Motion Alarm	Overload Sensing System
Flashing Beacons	Self-lock Gate
Emergency Descent System	Anti-extrusion device
Emergency Stop	
AC Power to the Platform	

Optional

Air Pipe to the Platform

Let customers win first

MODEL	HA14JE
Max. Working Height	16m
Max. Platform Height	14m
Max. Horizontal Extension	7.5m
Max. Up and Over Height	7.54m
A- Length (Stowed)	6.4m
B- Width (Stowed)	1.75m
C- Height (Stowed)	1.93m
D- Platform Length	1.52m
E- Platform Width	0.76m
F- Wheelbase	2.01m
G- Ground Clearance	0.2m
PERFORMANCE	
Platform Capacity	230kg
Max. Drive Speed (Stowed)	4.8km/h
Gradeability	30%
Turning Radius(In.)	0.8m
Turning Radius(Out.)	3.8m
Turntable Rotation	355°Non-Continuous
Platform Rotation	±80°
H- Turntable Tailswing	0
Tilt Rating	3°
Operating Wind Speed	12.5m/s
POWER	
Batteries (V/Ah)	48V/310Ah
Lithium battery(Optional)	51.2V/280Ah
Charger	100-240VAC/13.5A
Tires	705X210X445
WEIGHT	
Weight	7200kg
Hydraulic Tank Capacity	20L

