

# HS0607H Lead-acid or Lithium

GB/CE/ANSI Compliance

## HIGHLIGHTS

- Optimized matching, high cycle times, better endurance.
- Precise control greatly improves the smoothness of operating.
- Large ground clearance, stronger passability

## Low Maintenance Cost

- Universal and modular design, easy maintenance.
- Swing out trays of batteries and hydraulic system.
- More durable, stable and safe.

## Configurations Standard



Folding Guardrails	Platform Self-lock Door	Safety Arm
Emergency Stop	Charging Protection	Emergency Descent
Hour Meter	Pothole Protector	Proportional Control
Flashing Beacon	Automatic Braking System	Tilt Sensor
Self-diagnosis	Forklift Hole	Full Height Drive
Extension Platform	Motion Alarm	Horn

## Optional

Load Sensing System  
AC Power to the Platform  
Air Pipe to the Platform



MODEL	HS0607H
Max. Working Height(In/out)	7.8m/7m
A-Max. Platform Height(In/out)	5.8m/5m
B-Platform Length	1.63m
C-Platform Width	0.74m
Extension Size	0.9m
D-Heights (Rails Up)	2.17m
Height (Rails Down)	1.83m
E-Length (with Ladder)	1.86m
F-Overall Width	0.76m
G-Wheel Base	1.32m
H-Clearance (Stowed)	0.06m
I-Clearance (Raised)	0.02m
PERFORMANCE	
Platform Capacity	230kg
Extension Capacity	113kg
Max. Occupancy(in/out)	2/1
Max.Drive Speed (Stowed)	4km/h
Drive Speed (Raised)	0.8km/h
Turning Radius (Out.)	1.55m
Up/Down Time	16/34s
Gradeability	25%
Max. Slope	1.5°/3°
Control	Proportional
Drive	FWD
Multi Disc Brake	Rear
Tires (mm)	305mmX100mm
Max.Wind Speed	12.5m/s
POWER	
Batteries (V/Ah)	24V/200Ah
Lithium battery	24V/160Ah
Charger	100-240VAC/10A
WEIGHT	
Weight	1560kg

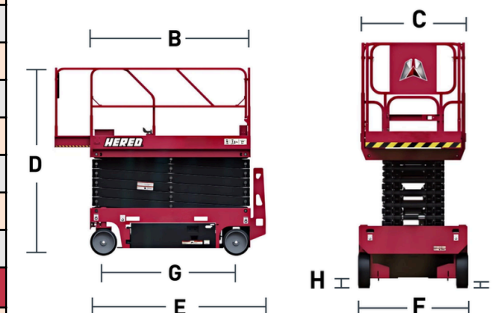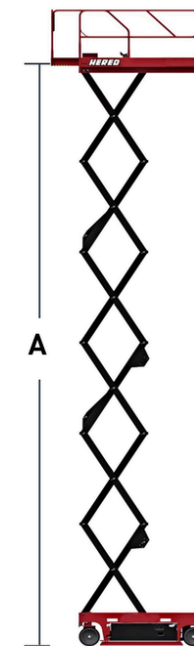

Let customers win first